

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
6 May 2005 (06.05.2005)

PCT


(10) International Publication Number  
**WO 2005/040657 A2**

- (51) International Patent Classification<sup>7</sup>: **F16L**
- (21) International Application Number:  
PCT/EP2004/010656
- (22) International Filing Date:  
22 September 2004 (22.09.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0311509 1 October 2003 (01.10.2003) FR
- (71) Applicant (for all designated States except US):  
**VALLOUREC MANNESMANN OIL & GAS  
FRANCE** [FR/FR]; 54, rue Anatole France, F-59620  
Aulnoye-Aymeries (FR).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **COULON,  
Jean-Luc** [FR/FR]; 12, rue des Francs-Bourgeois,

- F-59620 Monceau Saint Waast (FR). **MICMANDE,  
Jean-Claude** [FR/FR]; 187, rue de L'Hôtel de Ville,  
F-59620 Aulnoye-Aymeries (FR).
- (74) Agent: **ROUSSET, Jean-Claude**; Cabinet Netter, 36, Av-  
enue Hoche, F-75008 Paris (FR).
- (81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.
- (84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: A TUBULAR COMPONENT PROVIDED WITH MUTUALLY ORIENTED THREADED ELEMENTS, AND A METHOD FOR PRODUCING IT

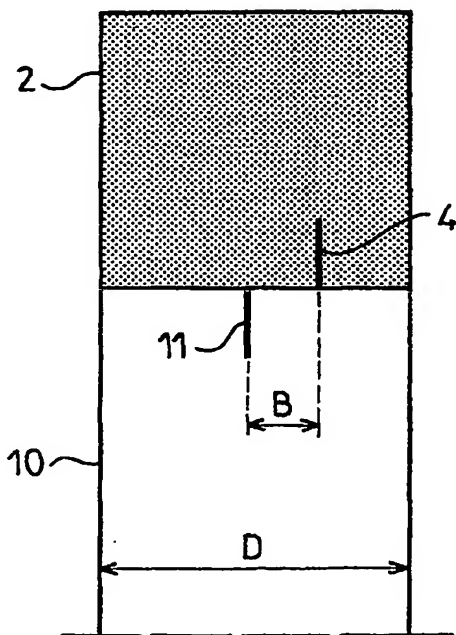

(57) Abstract: In the method according to the invention, after machining successively respective threaded elements at both ends of the tubular component (10), a second orientation gauge is screwed onto the second threaded element to check whether a mark (4) on the gauge comes into alignment with an orientation mark (11) which has been drawn on the component, after the first element has been machined and a first orientation gauge has been screwed onto the latter in axial alignment with a mark provided on this gauge. If not, the machining of the second element is repeated with parameters varied accordingly. Application to the drilling and operation of hydrocarbon wells.



FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- *without international search report and to be republished upon receipt of that report*